


# RemoteLPC LE

## LIQUID PARTICLE COUNTER

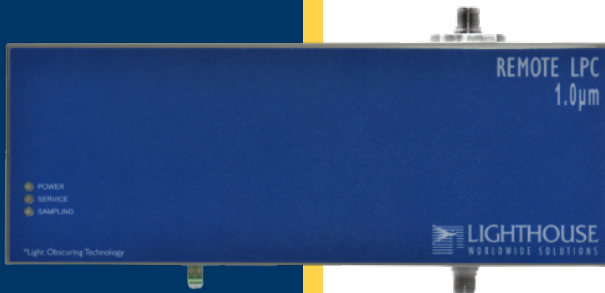


**T**he Remote LPC LE has a range of 1.0 - 50 microns or 1.0 - 200 microns particle sizes in liquid. With a flow rate of 30 ml per minute. The sensor is designed to accurately measure up to 8 channels of simultaneous particle count data.


This liquid particle counter was created for continuous, 24 hour per day, 7 days per week operation. The instrument provides versatile mounting options allowing installation where space is at a premium.

### F E A T U R E S

- 1.0 - 50.0µm or 1 - 200µm Particle Size Channels
- 30 ml per minute flow rate
- LED status indicators for power and service
- 8 Channel output by modbus; 4 channel by 4-20mA
- Interfaces with facility monitoring systems
- Compact size
- Designed for reliability
- 2 Year Warranty



 [Learn More](#)

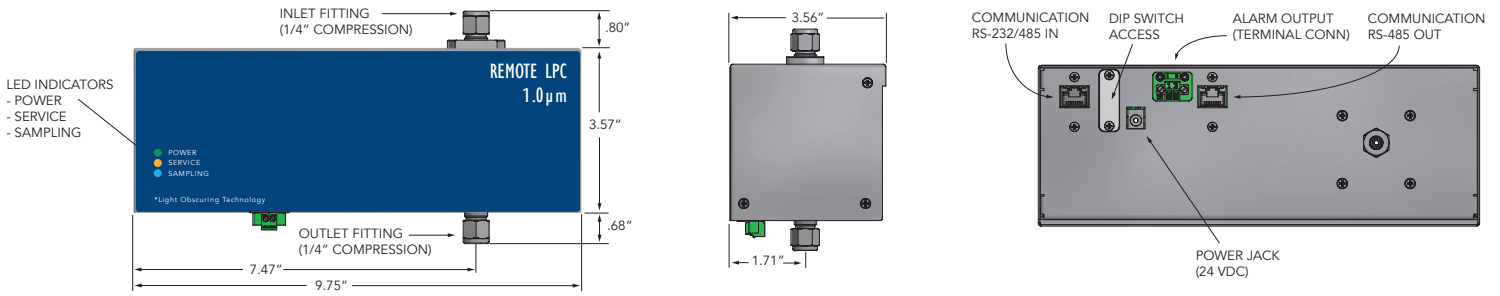

## TECHNICAL DATASHEET

### Remote Liquid Particle Counter

Features / Models	Remote LPC 1.0-50μm	Remote LPC 1.0-200μm
<b>Minimum Size Detection</b>	1.0 μm	1.0 μm
<b>Channel Sizes</b>	1.0, 3.0, 5.0, 10.0, 15.0, 20.0, 25.0, 50.0 μm	1.0, 5.0, 10.0, 15.0, 20.0, 25.0, 50.0, 200.0 μm
<b>Concentration Limit</b>	40,000 counts/ml @ 5% coincidence error	50,000 counts/ml @ 5% coincidence error
<b>Flow Rate</b>	30 mL / minute	
<b>Laser Source</b>	Laser Diode	
<b>Calibration</b>	NIST Traceable	
<b>Data Storage</b>	Rotating buffer 1,000 records	
<b>Communication Modes</b>	RS232/485 via RJ45 to PC, RS485 modbus, ASCII, Modbus or MR protocol	
<b>LED Indicators</b>	Power, Service, Sampling	
<b>Enclosure</b>	Stainless steel	
<b>Sample Inlet/Outlet Connection</b>	1/4" Compression	
<b>Sample Temperature</b>	32 - 158°F (0 - 70°C)	
<b>Sample Pressure</b>	150 PSI	
<b>Wetted Surface Materials</b>	Stainless Steel 316L, Quartz, Kalrez	
<b>Power</b>	24 VDC @ 150mA	
<b>Dimensions</b>	9.75"(l) x 3.75"(w) x 3.80"(h) [24.7 x 9.0 x 9.6 cm]	
<b>Weight</b>	4.30 lbs (1.95 kg)	

**Includes** Power supply; 2x 10' Teflon sample tubing; USB - RJ-45 serial cable, Power supply.

**Optional** Flowmeter, Additional sample tubing, remote mounting plate, stand with flowmeter mounting, RS232 communication kit, RS485 adapter cable.

**Distributed By:**



Lighthouse Worldwide Solutions reserves the right to change specifications without notice.

www.golighthouse.com  
info@golighthouse.com

+1-800-945-5905  
+1-541-770-5905

